



ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	9 V
NOMINAL CAPACITY	200 Ah
NOMINAL ENERGY	1560 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	100 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	400 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1'')	800 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	75 mAh

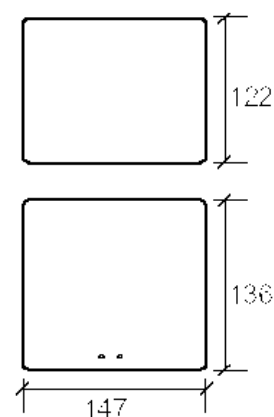

PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	147 mm
Width	136 mm
Height	122 mm
NET WEIGHT	4,5 Kg
VOLUME	2,42 dm ³
CASE MATERIAL	Plastic *
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None




USE	CAPACITY			
	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	105	24 H	5,4	193
NORMAL	225	24 H	5,4	19

* High impact polystyrene.

TYPICAL HEAVY SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME FORT

105 Ω - 24 HOURS / DAY - CUT OFF 5,4 VOLTS


105 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 5,4 VOLTS

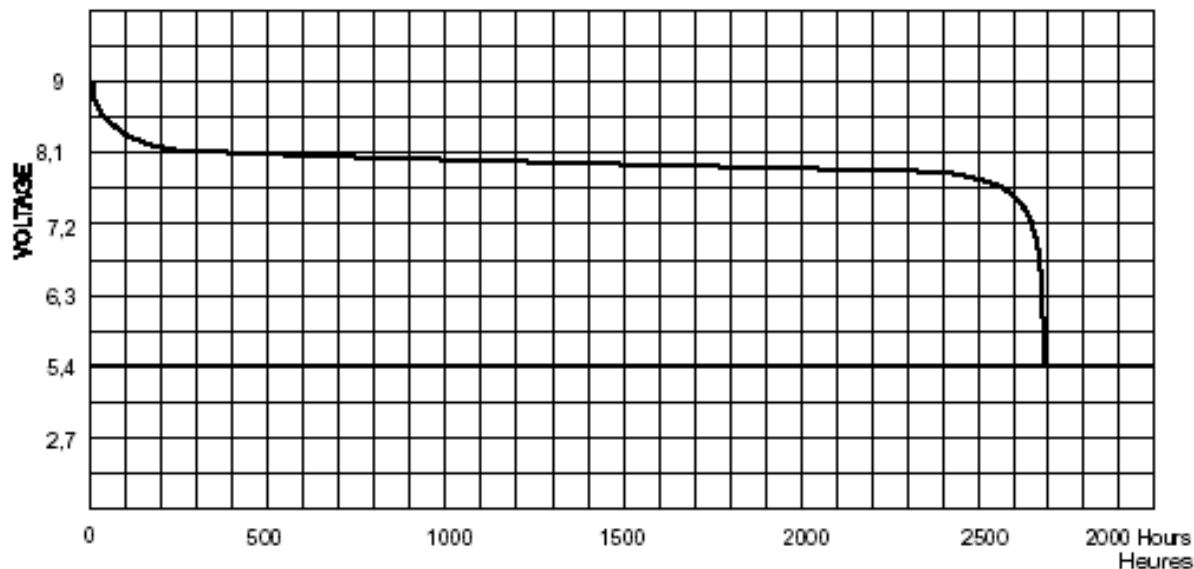


TYPICAL LIGHT SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME LENT

225 Ω - 24 HOURS / DAY - CUT OFF 5,4 VOLTS

225 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 5,4 VOLTS

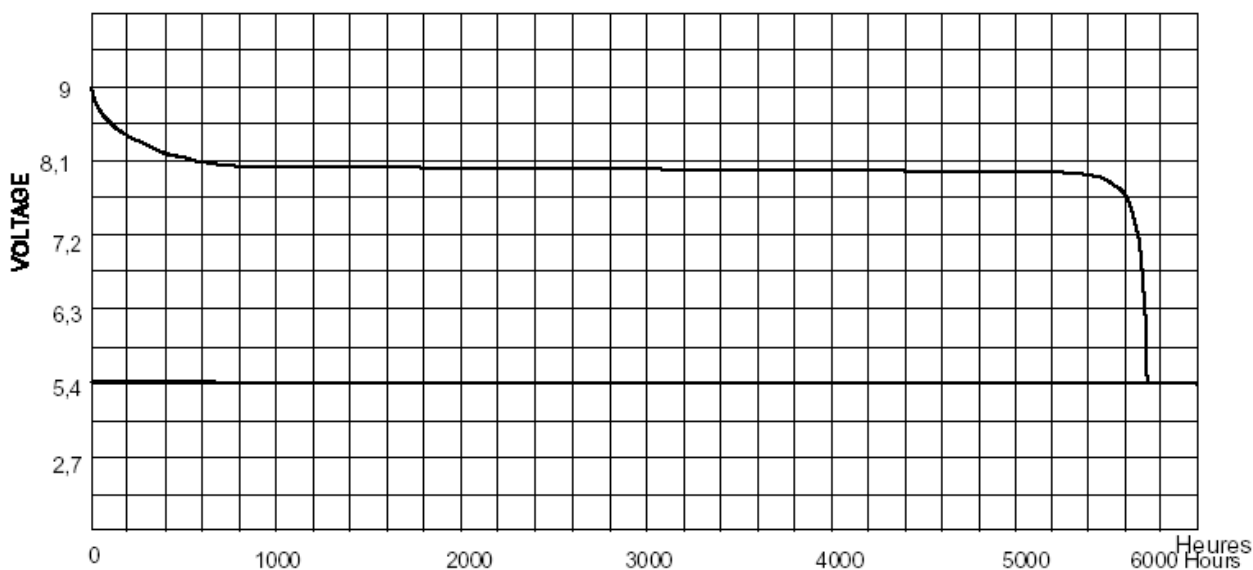

CAPACITY AS A FUNCTION OF TEMPERATURE AND DUTY
CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME

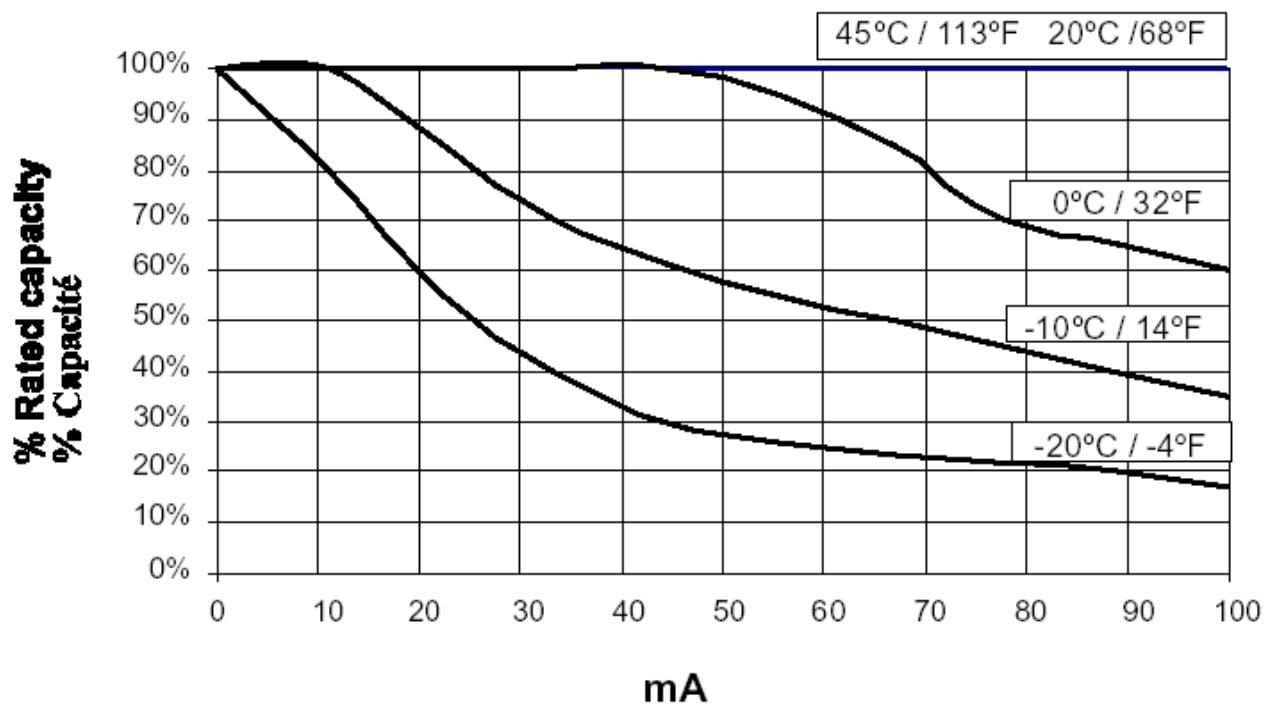

CAPACITY AS A FUNCTION OF SHELF LIFE
CAPACITÉ EN FONCTION DE LA CONSERVATION

YEARS ANNÉES	CAPACITY CAPACITÉ Ah
1	190
2	183