


### ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	1,5 V
NOMINAL CAPACITY	700 Ah
NOMINAL ENERGY	910 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	400 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	1600 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1'')	3200 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	300 mAh

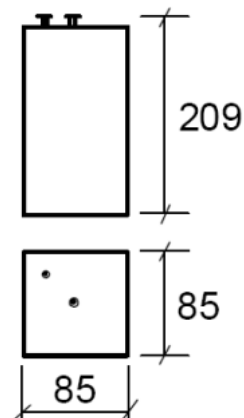


### PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	85 mm
Width	85 mm
Height	188/209 mm
NET WEIGHT	2,50 Kg
VOLUME	1,37 dm <sup>3</sup>
CASE MATERIAL	Plastic*
TERMINALS	Nº 2
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None

CAPACITY				
USE	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	5	24 H	0,9	680
NORMAL	10	14 H	0,9	680


- High impact polystyrene.

**COURBE DE DÉCHARGE POUR RÉGIME FORT**  
**5 Ω - CONTINU - TENSION D'ARRÊT 0,9 VOLTS**

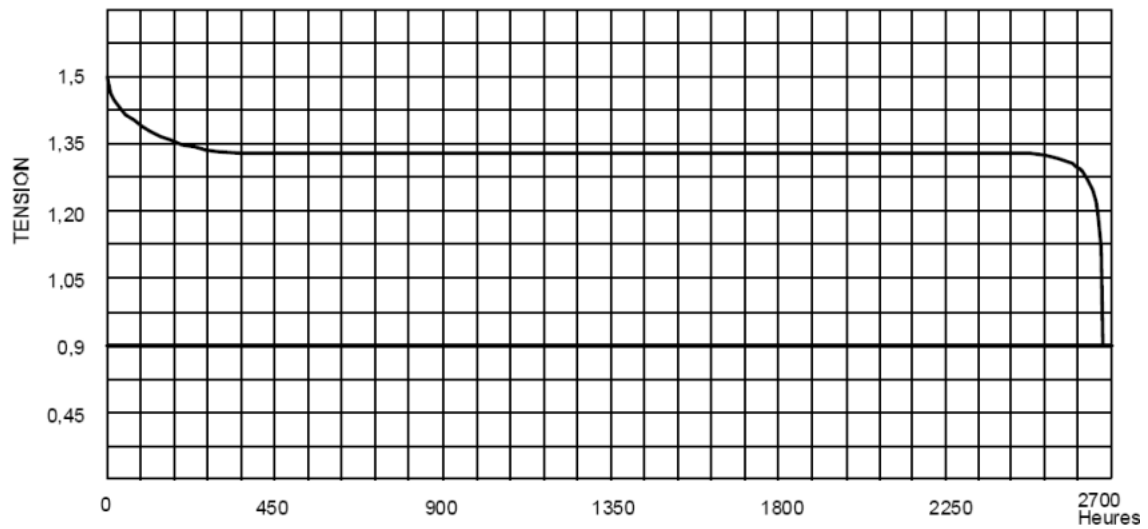


**COURBE DE DÉCHARGE POUR RÉGIME LENT**

**10 Ω - 14 HEURES / JOUR - TENSION D'ARRÊT 0.9 VOLTS**

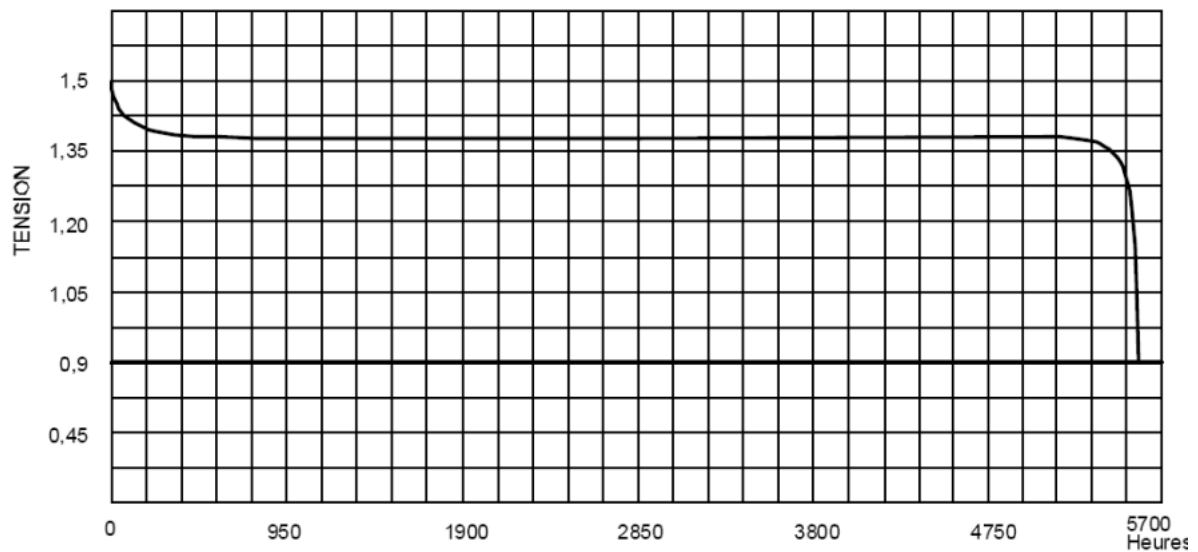

**CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME**

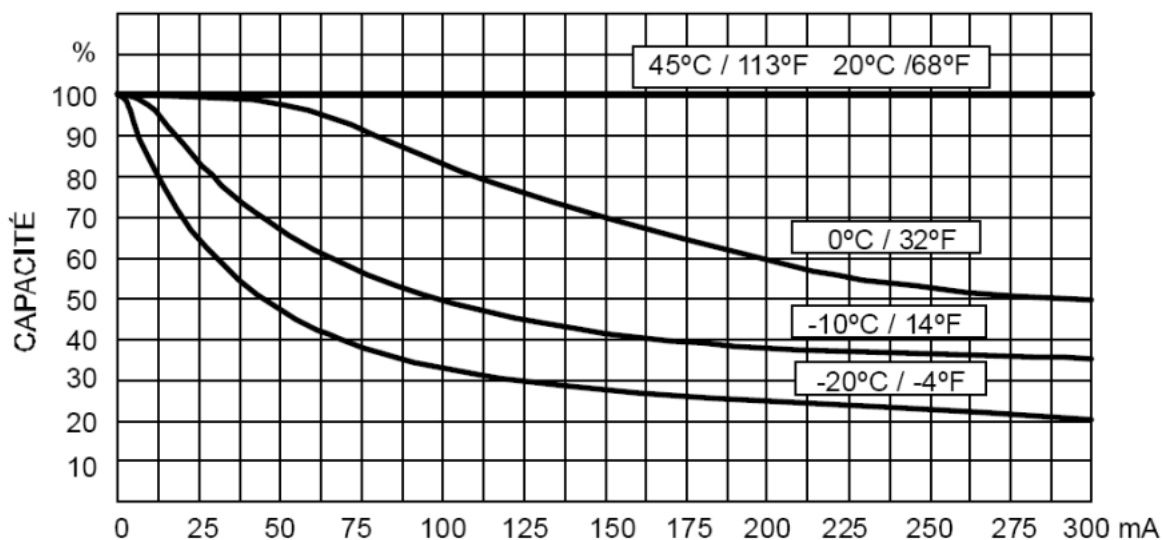

**CAPACITÉ EN FONCTION DE LA CONSERVATION**

<b>ANNÉES</b>	<b>CAPACITÉ Ah</b>
<b>1</b>	<b>646</b>
<b>2</b>	<b>612</b>